

NEW

MODEL SD-654-3 MAGNETIC TAPE APPLICATOR

The SD-654 Tape Applicator is designed to apply magnetic tape to flat surfaces. Tape strips can be applied continuously or short strips with gaps can be applied to each product as required. This tape applicator can be mounted over a moving product, conveyor or used on custom designed taping equipment moving the tape applicator across the product.


FEATURES

The Model SD-654 applies up to 1/16" thick x 3" wide magnetic tape to a product, moving either the product or the tape applicator, which pulls the tape from the roll. Speed is adjustable up to 30 fpm.

SPECIFICATIONS

- Cut tolerance +/- 1/8"
- Maximum roll diameter: 12"
- Weight: 35 lbs.
- Shortest piece: 3.75"
- Tape spacing between tapes: 7 1/4" to 19" depending on configuration of applicators

Note: The product to be taped must be firmly driven under the tape applicator at all times. Alternatively, the product to be taped must be firmly secured while the taping head is driven over the product.

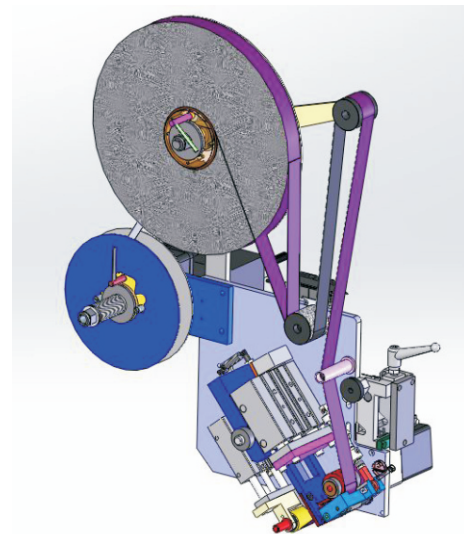

SD-654-3 Magnetic Tape Applicator

MACHINE & POWER SPECIFICATION

24v DC, 2A or 120v AC, 1A, 50/60Hz

Air: 60 PSIG (4.1 bar gauge) 0.4 SCFM (11.2 liters/min)

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.

邮编: 201108

传真: 021-54429554

电话: 021-67681975

网址: www.dehao.com

邮箱: emily@dehao.com

网址: www.dspuxuan.com

地址: 上海市莘庄工业区春东路479号D1栋

电话: 021-67681975

上海工厂地址: 金都西路655号