


### NEW

### MODEL SD-656-20 TAPE APPLICATION SYSTEM

The SD-656-20 Tape Application System is designed to feed product to up to 4 Straub Design tape applicators at speeds of up to 200 feet per minute. Tape strips can be applied continuously or as short strips with gaps to each product and tape applicator as required. A wide variety of Straub Design tape applicators can be mounted on the SD-656 to provide the desired speed, tape type and substrate required for each production application.

### FEATURES

- Handles products up to 20" wide.
- Product speed up to 200feet per minute.
- Accommodates product up to 1/8" thick.
- Accommodates up to four Straub Design tape applicators.
- Touch screen operation interface.
- Quick electrical and pneumatic disconnect.
- Individual tape head programming.
- Product batch count.

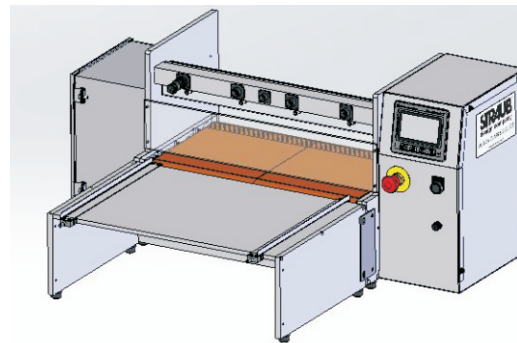

SD-656Tape Application System

### SPECIFICATIONS

- Maximum tape roll diameter: 12"
- Size: 30"w x 18"h x 32"d
- Weight: 150 lbs.

Note: The product to be taped must be firmly driven under the tape applicator at all times. Alternatively, the product to be taped must be firmly secured while the taping head is driven over the product. For optimum performance on non-rigid products, it is recommended that the sum of the tape strip length and inset length be greater than 3" (75 mm).

### MACHINE & POWER SPECIFICATION

Electrical: 115V/230V

Air: 60 PSIG (4.1 bar gauge) 0.4 SCFM (11.2 liters/min)

Size: 30"w x 18"h x 32"d

Weight: 150 lbs.

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.