

MODEL T-646WH TAPE APPLICATOR

The T646WH Taping Applicator is designed to apply a wide variety of pressure sensitive tapes to flat surfaces. Tape strips can be applied continuously or short strips with gaps can be applied to each product as required.

FEATURES

- The Model T646WH applies tape to a moving product, which pulls the tape from the roll.


OPTIONS

- Liner removal for some double-coated tapes.
- Wider than 1" (25 mm) tape widths.
- Product sensor and mounting kit for attachment to right side of main plate.
- Control systems to start and stop the tape application.

PRODUCT SPECIFICATIONS

- Tape Width: ½" or 12.5 mm, ¾" or 18.8 mm, 1" or 25 mm
- Tape Roll Size: Up to 14" (355 mm) on a 3" (75 mm) inside diameter core, with optional extender up to 18"
- Min. Tape Strip Length: 1" (25 mm)
- Min. Tape Strip Placement from Leading Edge: 0.13" (3 mm), depending on tape and product
- Tape Start & Stop Tolerance: ±0.09" (±2.3 mm) Tape Strip Gap: 1" (25 mm) minimum
- Tape Strip Centerline to Centerline: 2.08" minimum

Note: The product to be taped must be firmly driven under the taping head at all times. Alternatively, the product to be taped must be firmly secured while the taping head is driven over the product. For optimum performance on non-rigid products, it is recommended that the sum of the tape strip length and inset length be greater than 2" (50 mm).

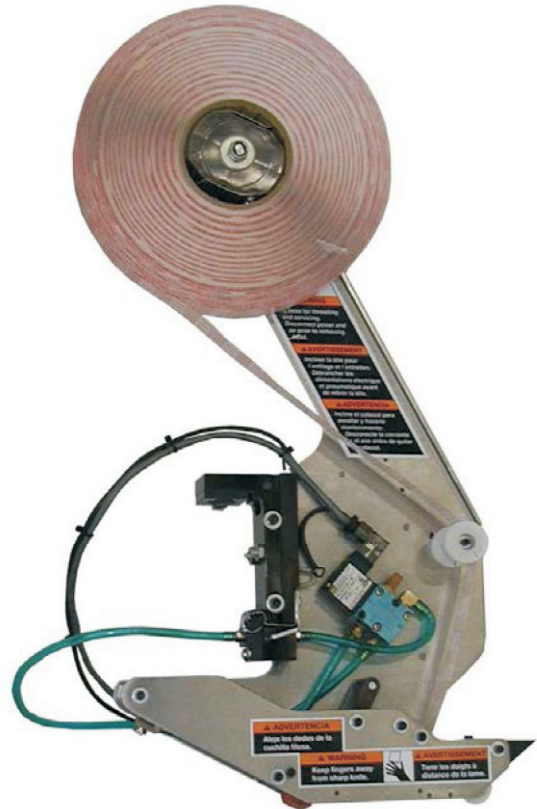

POWER SPECIFICATION

- Electrical: 24VDC, .5A
- Air: 60 PSIG (4.1 bar gauge) 0.4 scfm (11.2 liters/min.)
- Conveying Speed: Up to 150' per min. (46.2meter/min.)
- Size: 12" wide x 20½" high x 2¼" deep
- Weight: Crated – 11 lbs. (5kg) approx.; Uncrated – 8 lbs. (3.7kg) approx.

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.