

TECHNICAL DATA SHEET

MODEL T646WI/T646F TAPE APPLICATION SYSTEM

The T646Wi/T646f Tape Application System automatically or semi automatically applies strips and/or spots of many adhesive transfer and double coated tapes to flat surfaces.

FEATURES

- Applies tape to products with automatic feed up to 20" wide and up to 30" wide with manual feed
- Product adjustable up to 150ft/min.
- Accommodates product up to 1¼" thick
- Accommodates ½, ¾, or - 1" wide tape (up to 2" optional 2" tape head.)
- Two heads standard; accommodates up to four taping heads
- Individual tape head programming
- Touch screen operation interface
- Displays characters in English, French, or Spanish
- Displays number in inches or millimeters
- Product batch count

OPTIONS

- Catch Tray
- Two additional taping heads
- Product stabilization heads
- Narrower widths of tape

PRODUCT SPECIFICATIONS

Product Width: 2¼ - 30" wide

Tape Roll Size: Up to 14" on a 3" ID core

Tape Centerline: 1" tape heads, 2.08" minimum; 2" tape heads, 3.750" minimum


Minimum Tape Length: 1" (25 mm)

Number of Tape Heads: Up to four

Minimum Tape Placement from Leading Edge: .13" (3 mm)

Tape Strip Placement: ±.09" (±2.3 mm)

Tape Strip Gap: 1" minimum (25 mm)

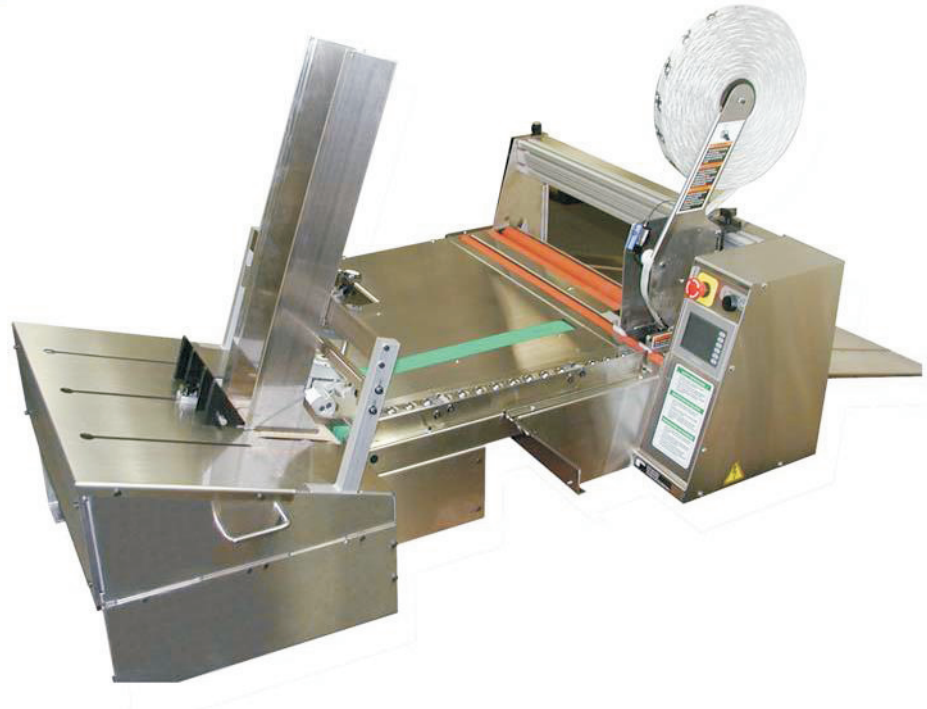

POWER SPECIFICATIONS

Electrical: 115/230V, 1Ph, 50/60Hz

Air: 80 PSI (550 kPa), ¼" NPT

Size: 41" wide x 33" high x 53" deep

Weight: 600 lbs. approximately, boxed for shipment

We specialize in designing and building automatic production equipment from concept through final installation and start-up. Application engineers are available to assist customers in selecting the proper machine for your application.

邮编:201108

传真:021-54429554

电话:021-67681975

网址: www.dehao.com

邮箱: emily@dehao.com

网址: www.dpspuxuan.com

地址: 上海市莘庄工业区春东路479号D1栋

电话: 021-67681975

上海工厂地址: 金都西路655号

